

AECs

A E C S . N E T

TYRE CHANGER



TYREMATE 200TL BY MANATEC



- Fully automatic.
- Designed for normal, low profile & runflat tyres on cars and light commercial.
- Four jaw self centering chuck.
- Alloy wheel plastic protector for jaws.
- Pneumatically operated tilting type vertical column.
- Pneumatically operated twin cylinders for firm clamping.

TECH SPECS:

Rim clamping from inside: 12" - 24" (305 mm - 610 mm)
Rim clamping from outside: 10" - 20" (254 mm - 508 mm)
Max. wheel diameter: 1041 mm
Max. wheel width: 3"-12" (76 mm - 305 mm)
Operating pressure: 6 - 8 bar
Bead breaker force: 2500 kg
Power Supply: 240V AC, 1 ph, 50Hz 1.5 HP

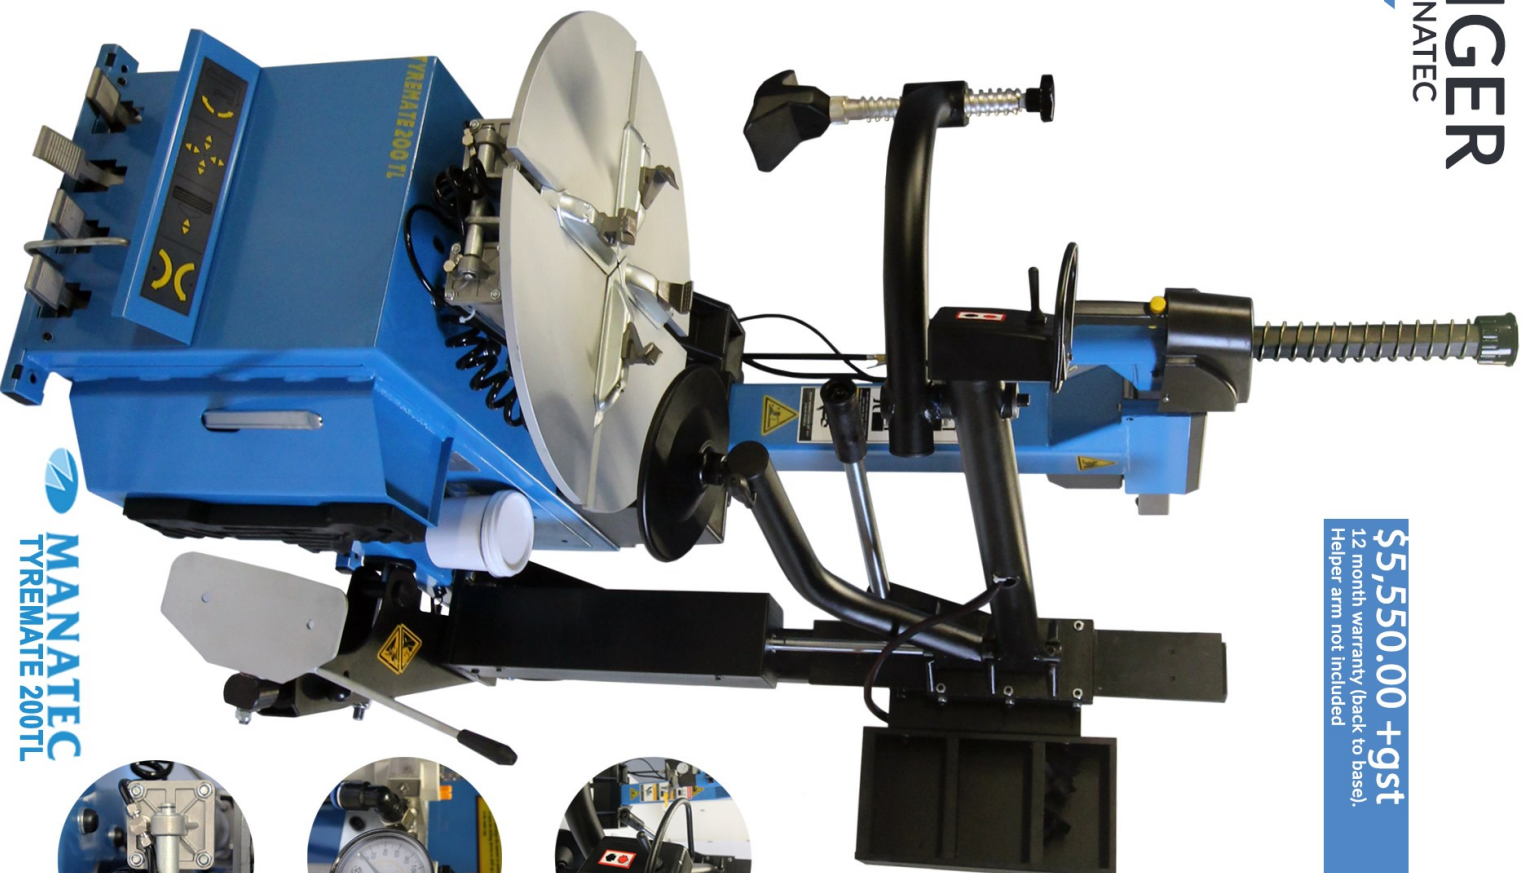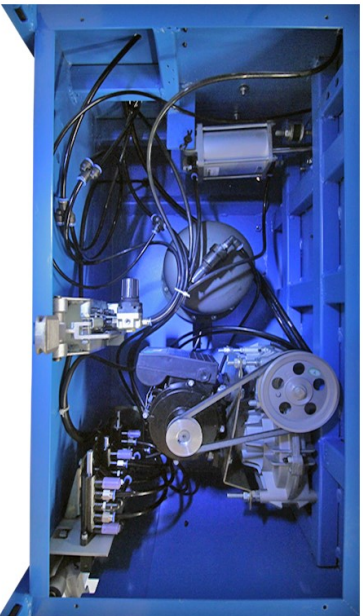

\$5,550.00 +gst
12 month warranty (back to base).
Helper arm not included



MANATEC
TYREMATE 200TL

AECs ☎ 06 874 9077

✉ info@aecs.net

🌐 aecs.net